

Fixturlaser XA

Programs and Express Functions



Fixturlaser XA is the alignment system for Express Alignment. This first edition of Fixturlaser XA includes programs for basic shaft alignment: Horizontal and Vertical shaft alignment, Sensor display, Target values and Softcheck™.

Choose program by touching the icon shown on the touch screen main menu (as shown to the right).





Horizontal Shaft Alignment - Express alignment of horizontally mounted machines

- Express alignment check
- 3D Flash® animated user guiding
- Color coded results
- Autoview™
- Results like feet values or coupling values

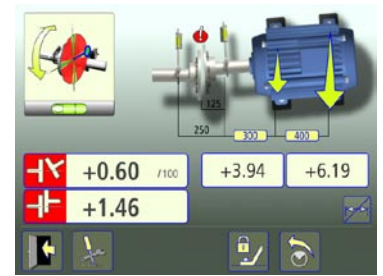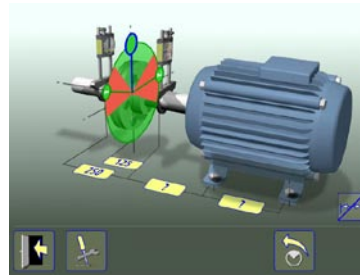



Soft Check™ - Control and compensate for soft foot conditions

- 3D Flash® animated user guiding
- Large result values
- Go directly from Soft check™ to shaft alignment
- Multi access™

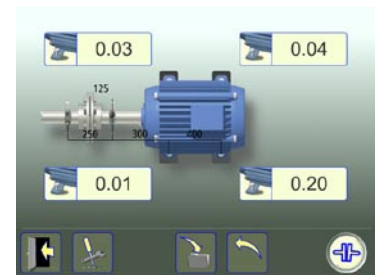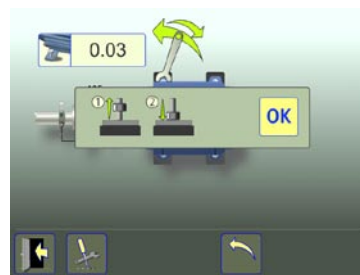


Feet Lock™ - For extended adjustment capabilities

- 3D Flash® animated user guiding
- Color coded results
- Autoview™

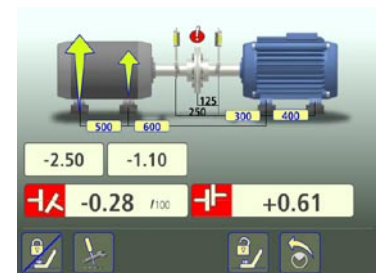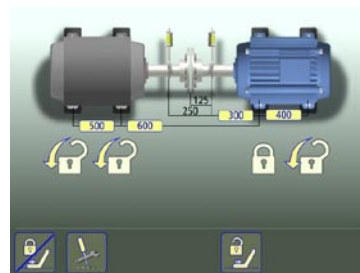


Vertical Shaft Alignment - Express alignment of vertically mounted machines

- Express 3D instructions
- Up to 256 bolts
- Color coded results

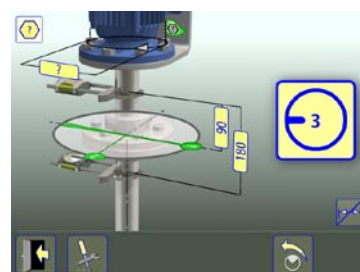

Target Values - Compensate for predetermined alignment targets

- Insert foot or coupling values
- Go directly from Target values to shaft alignment
- Results like feet values or coupling values
- Multi access™

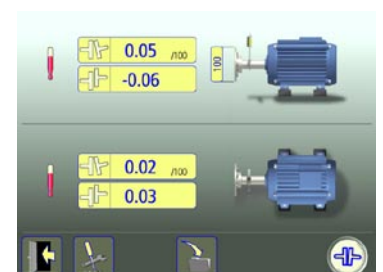

Express Alignment Accessories

Fixturlaser offers a variety of shaft alignment accessories for fast and efficient shaft alignment - in line with our Express alignment concept.

Wireless package 1-0756

For Express measurement without cables



Carrying strap 1-0758

For express handling of the Fixturlaser XA



Back pack solution 1-0765

For express carrying of the Fixturlaser XA case



Extension fixture* 1-0767

For limited space when mounting the Measurement units



Thin chain fixture XA* 1-0775

For limited space when mounting the measurement units




Fixture for non-rotating shaft XA* 1-0776

For machines with non or limited shaft rotation



Magnetic base* 1-0083

For faster mounting on large diameter shafts. Here used with an extension fixture which is not included.



Rod kit, 2 x 250 & 2 x 500 mm 1-0673



Cable 10 m 1-0768



Note! * Measurement units and rods are not included.

Fixturlaser XA



*) The wireless units shown on the photo above are optional

Article	Qty.	Art.no.
The complete system		1-0759
a. Case	1	1-0761
b. Display unit	1	1-0753
c. Measurement unit TDM	1	1-0754
d. Measurement unit TDS	1	1-0755
e. Rod kit	1	2-0761
f. Chain	2	2-0763
g. Chain, 1020 mm	2	2-0397
h. V-block	2	2-0739
i. AC adapter	1	5-0650
j. Cable, 3 m	1	1-0757
k. Measuring tape	1	2-0320
l. Tool	2	3-0843

